
## Geschraubte Wärmetauscher

Übersicht DN32-DN80



# Geschraubte, erweiterbare, demontier- und inspizierbare Plattenwärmetauscher










MODELS		DN 32 (1 1/4")			DN 50 (2")			DN 65 ( 2 ½")			DN 80 ( 3")
		S020+	S040+	S080+	S070+	S160+	S260+	S110+	S210+	S410+	S270+
max Durchfluss	m3/h		19			63			80		110
Übertragungsfläche	m2	1,6	3,1	8,2	11,8	41,2	63,8	17,8	31,7	99,1	68,5
Wellenwinkel der Platte	A/B	А			A/B			A/B			A/B
Plattenhöhe	mm	2,9 x np			2,9 x np			3 x np			3 x np
Bauhöhe H	mm	320	470	755	678 - 720	1008 - 1050	1353 -1395	584	848	1375	1071
Baubreite W	mm	200			310			320			320

#### **Produkt-Details**

Das Know-how von POWER SOLAR zeichnet sich auch durch jedes einzelne funktionale Detail aus.

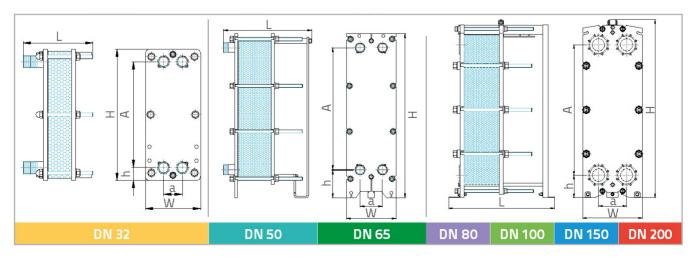

### Geschraubte Wärmetauscher

Übersicht DN100-DN200





### Unsere hervorragenden Geometrien:

Hoher Wirkungsgrad und reduzierter Druckabfall

für alle Leistungsanwendungen



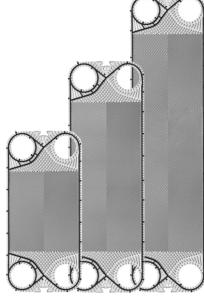

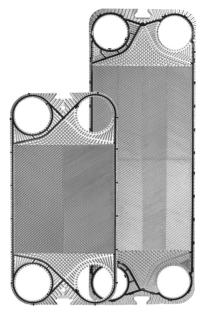

DN 100 ( 4")					DN 150 (6"	)	DN 200 ( 8")		
S300+	S450+	S455+	S705+	S400+	S600+	S900+	S650+	S990+	
	240				380		800	730	
108	193	188	276	215	355 631		334	534	
	A/B				A/B		A/B A/B		
3,1	3,1 x np 2,7 x np				3,1 x np		3,3 x np	3,1 x np	
1124	1569	1569	2034	1372	1819	2272 - 2317	1657 - 1707	2190 - 2206	
530					609		810	790	

#### Kälte-Isolierung



**Edelstahl Tragstange** 



Wärme-Isolierung



**Plattenerweiterung** 



**Edelstahl-Rahmen** 



**Einfache Montage** 





Mehr Informationen über Geschraubte Wärmetauscher